
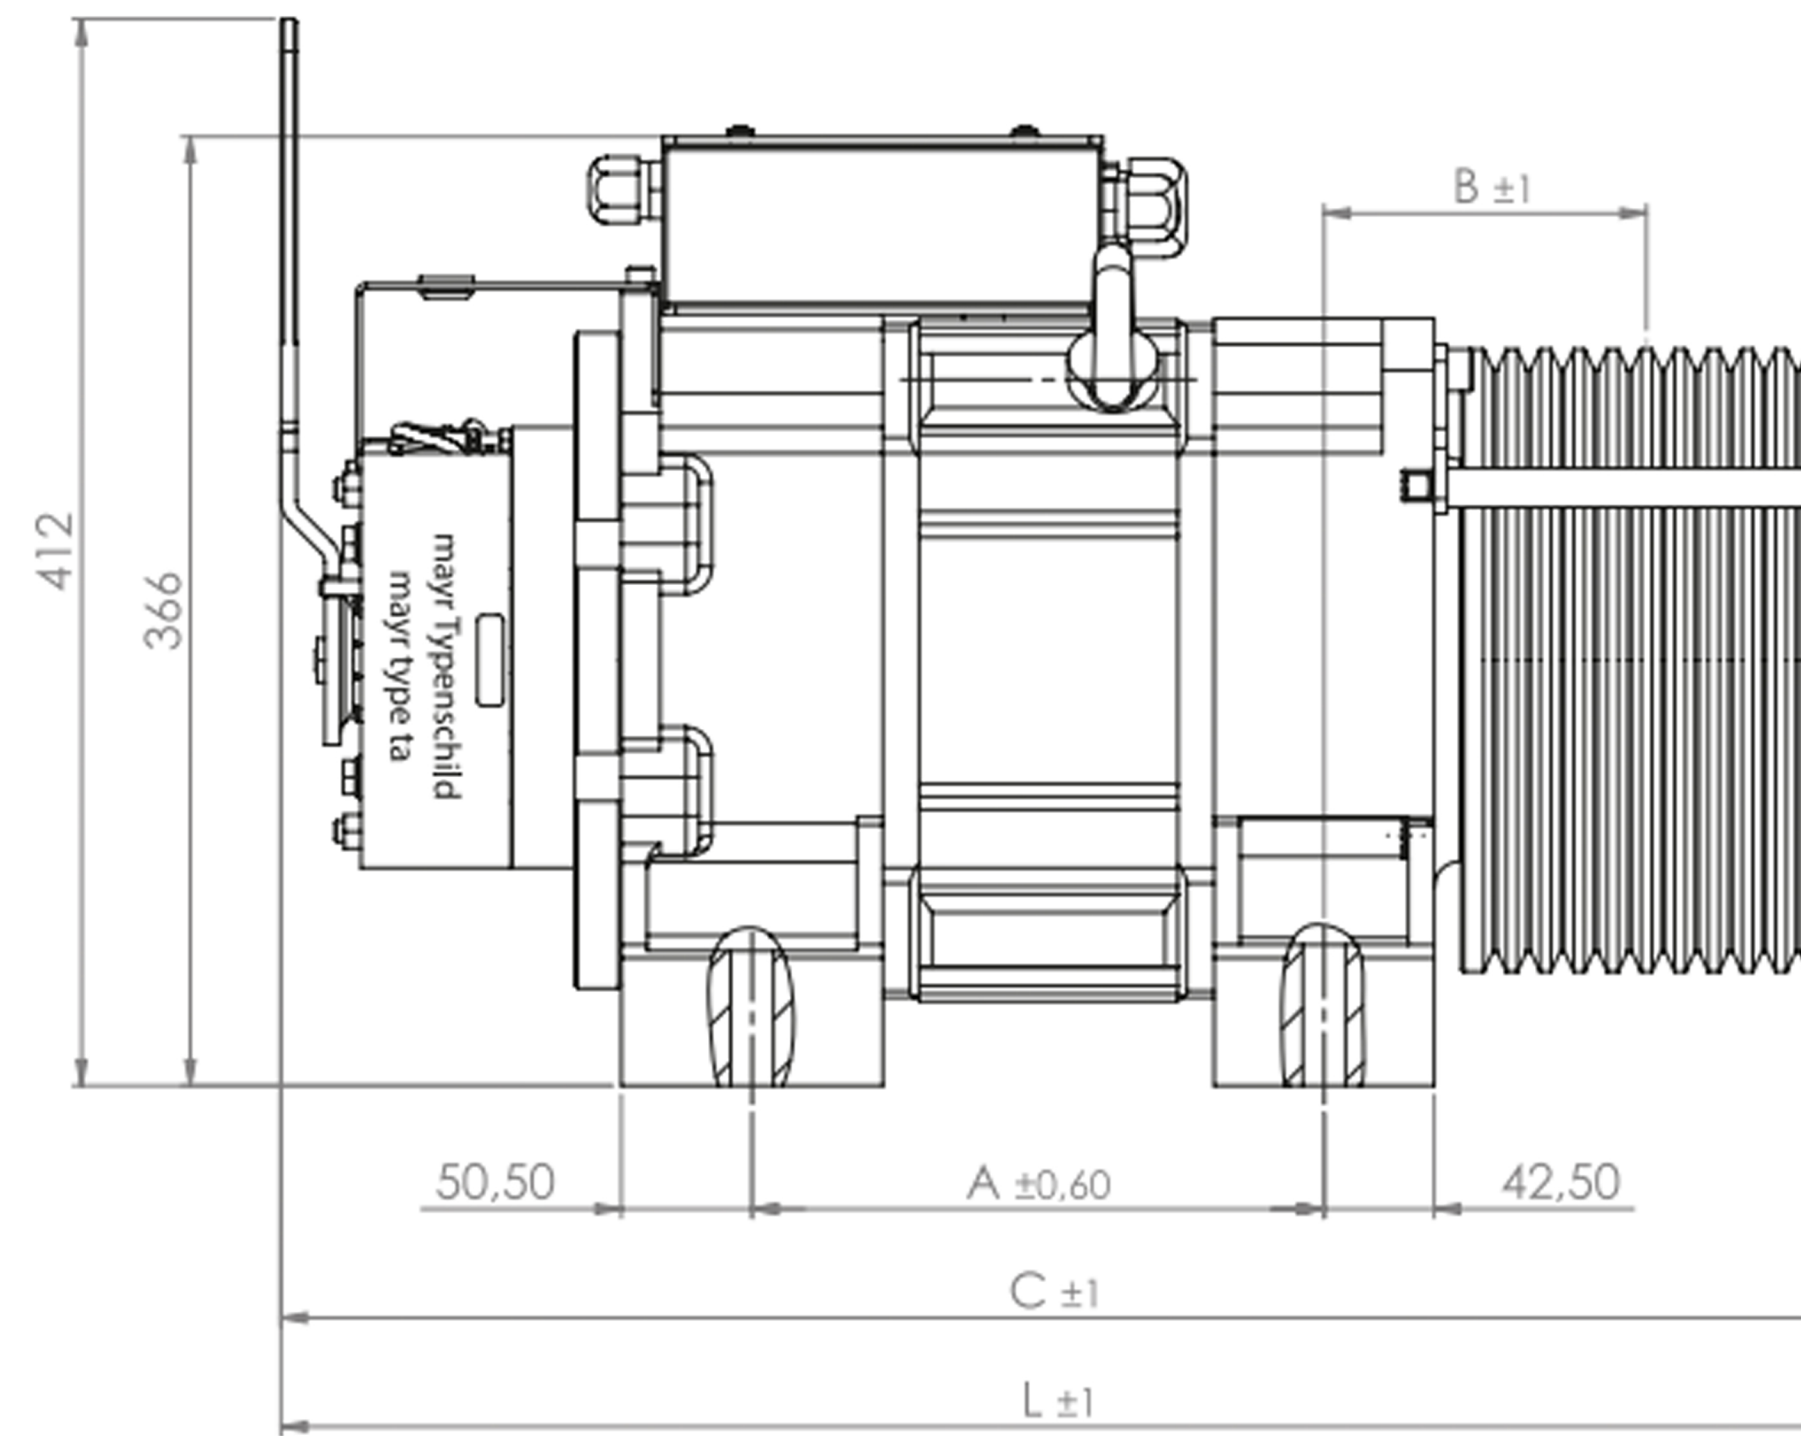


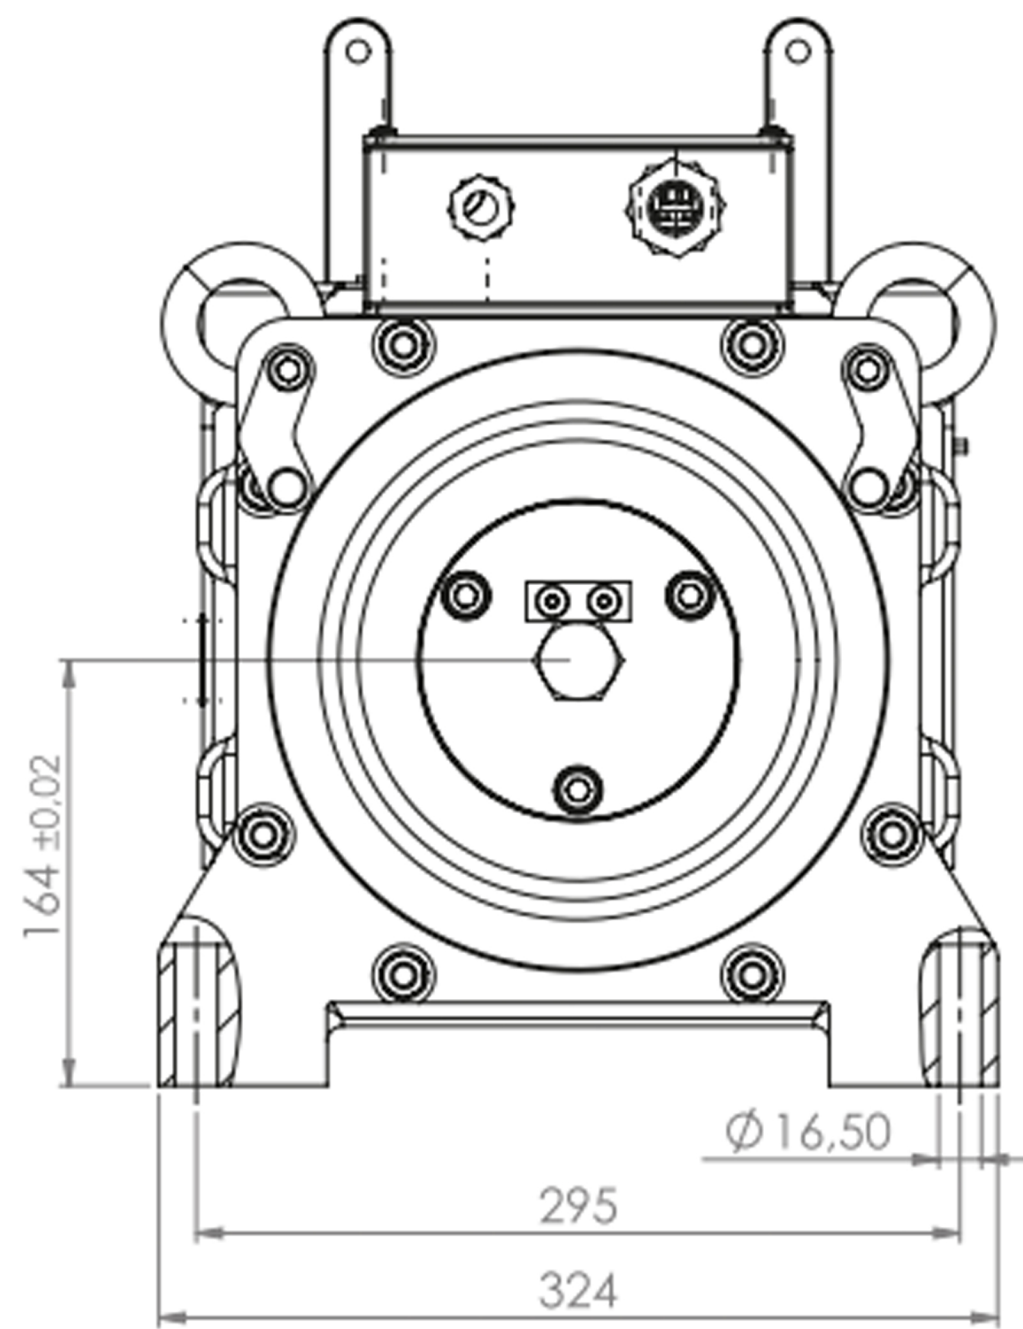

Suspension Askı	Motor Nr. Motor Nr.	Motor Code Motor Tipi	Load Capacity Taşıma Kapasitesi kg	Traveling Speed Kabin Hızı m/s	Traction Sheave Kasnak mm	Rope Values Halat Adedi x Çapı x mm	A mm	B mm	L mm	Weight Toplam Ağırlık kg
1:1	a	132-140	400	1,0	Ø 240	8 x 6,5	261	117	672	201
	b	132-140	400	1,6	Ø 240	8 x 6,5	261	117	672	201
	c	132-140	400	1,0	Ø 210	9 x 6,5	261	118	672	193
	d	132-140	400	1,6	Ø 210	9 x 6,5	261	118	672	193
	e	132-140	480	1,0	Ø 240	9 x 6,5	261	119	672	202
	f	132-140	480	1,6	Ø 240	9 x 6,5	261	119	672	202
2:1	g	132-140	630	1,6	Ø 240	6 x 6,5	261	105	642	198
	h	132-160	630	1,6	Ø 320	4 x 8	281	86	692	207
	i	132-100	800	1,0	Ø 210	8 x 6,5	221	115	602	175
	j	132-140	800	1,0	Ø 240	7 x 6,5	261	105	672	198
	k	132-140	800	1,6	Ø 240	7 x 6,5	261	105	672	198
	l	132-160	800	1,0	Ø 320	5 x 8	281	86	692	215
	m	132-160	800	1,6	Ø 320	5 x 8	281	86	692	215
	n	132-180	800	2,0	Ø 320	6 x 8	301	102	712	230
	o	132-160	1000	1,0	Ø 240	9 x 6,5	281	119	692	210
	p	132-160	1000	1,6	Ø 240	9 x 6,5	281	119	692	210

Groove Distance	mm
• 210 Sheave	13
• 240 Sheave	13
• 320 Sheave	16
• 400 Sheave	20

EMF Motor®