
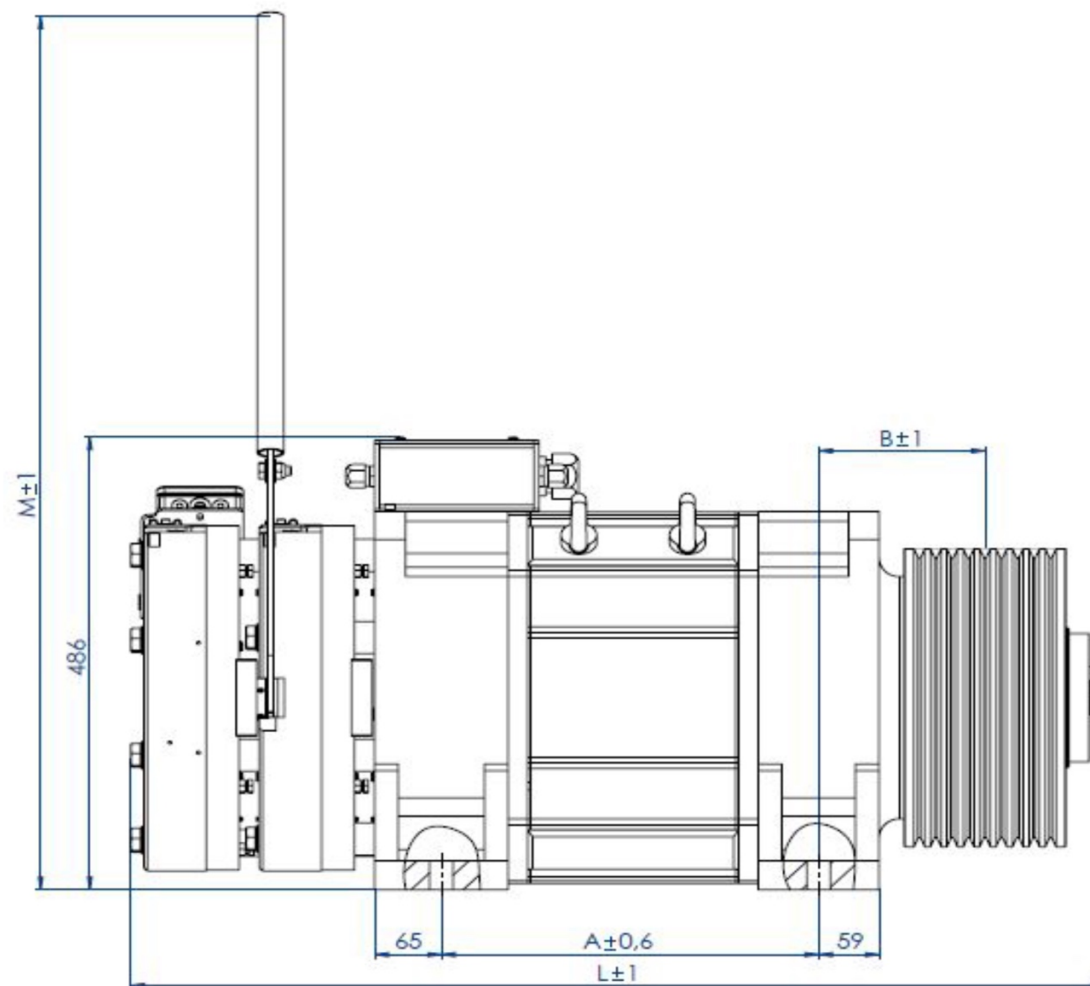


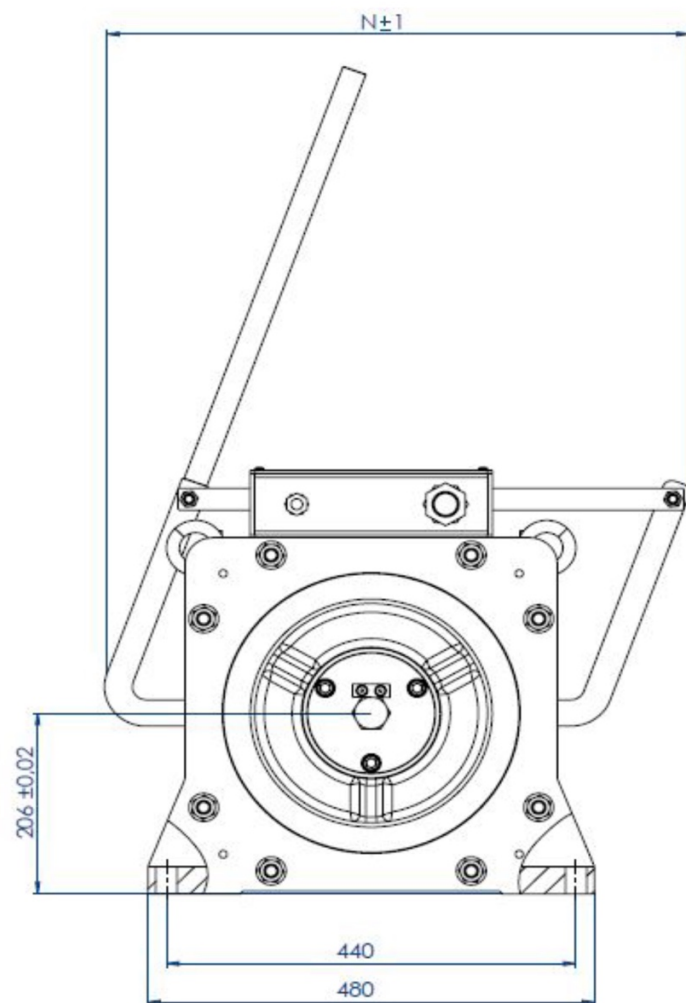

Groove Distance	mm
• 210 Sheave	13
• 240 Sheave	13
• 320 Sheave	16
• 400 Sheave	20

EMF Motor®

Suspension Askı	Motor Nr. Motor Nr.	Motor Code Motor Tipi	Load Capacity Taşıma Kapasitesi kg	Traveling Speed Kabin Hızı m/s	Traction Sheave Kasnak mm	Rope Values Halat Adedi x Çapı x mm	A mm	B mm	L mm	Weight Toplam Ağırlık kg
2:1	a	200-240	1000	2,00	Ø 320	7 x 8	408	146	913	562
	b	200-240	1000	2,50	Ø 400	5 x 10	408	139,5	913	581
	c	200-200	1250	1,00	Ø 320	8 x 8	368	154	873	521
	d	200-200	1250	1,60	Ø 320	8 x 8	368	154	873	521
	e	200-240	1250	2,00	Ø 320	9 x 8	408	162	913	520
	f	200-300	1250	2,50	Ø 400	6 x 10	468	154,5	973	648
	g	200-200	1600	1,00	Ø 320	9 x 8	368	162	873	520
	h	200-300	1600	1,60	Ø 320	9 x 8	468	162	973	618
	i	200-300	1600	2,00	Ø 320	10 x 8	468	170	983	632
	j	200-300	1600	2,50	Ø 400	7 x 10	468	154,5	1047	713
	k	200-300	2000	1,00	Ø 320	11 x 8	468	178	1060	697
	l	200-300	2000	1,60	Ø 320	11 x 8	468	178	1060	697
	m	200-300	2000	2,00	Ø 320	12 x 8	468	186	1060	730
	n	200-300	2000	2,50	Ø 400	8 x 10	468	174,5	1038	730
	o	200-300	2500	1,00	Ø 400	9 x 10	468	174,5	1038	729
	p	200-300	2500	1,60	Ø 400	9 x 10	468	174,5	1038	729
	r	200-300	2500	2,00	Ø 400	9 x 10	468	174,5	1038	729
	s	200-300	3000	0,50	Ø 400	12 x 10	468	204,5	1098	771
	t	200-300	3000	1,00	Ø 400	12 x 10	468	204,5	1098	771